



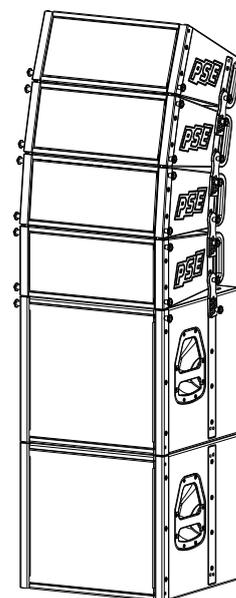

VT-62 Line Array

2x6.5"/2.5" bi-amp

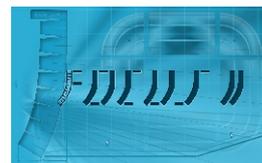

SYSTEM 480 for stacking and rigging

Features VT-62

- 2x6.5" neodymium speaker (2" voice coil)
- 1x2.5" (63mm) neodymium compression driver
- high frequency planar wave guide horn
- wave guide horn directivity h90°/v10°
- constant horn directivity
- curving angles 0°-10° in 1° steps
- 3-point and 4-point rigging structure
- 2 Neutrik speakon 4-pin
- speaker signal link function
- perforated steel front grill powder coated
- acoustic foam 4mm behind front grill
- wood housing 15mm and 18mm plywood
- polyurea (PU) high scratch proof coating
- optional regular painting black or white

Appliance VT-62

- line array unit for mobile and touring PA
- line array unit for fix installation

Application VT-62

- live events, live entertainment
- stadium broadcasting,
- discotheque and mobile disco event
- meeting halls broadcast system


extended system components

LB-15* Low-Mid extension (1x15")

VT-68* Line Array

SB-82 subwoofer (2x18")

*with rigging hardware

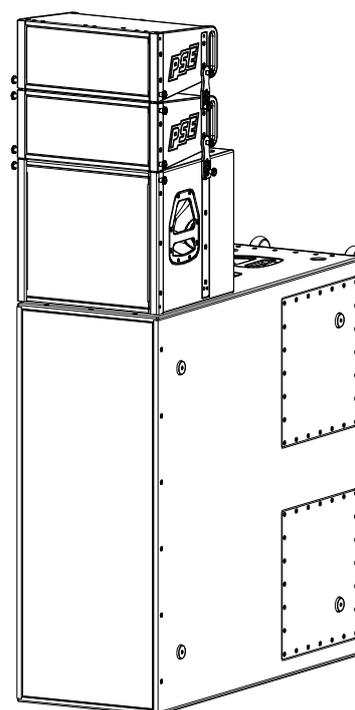

specification

model	VT-62
rated impedance	16Ω (8Ω)
operation mode	bi-amp
power handling capacity midrange AES/peak*	400W / 1200W*
power handling capacity HF AES/peak*	60W / 180W*
available frequency response**	80Hz-20kHz
max. sound pressure level***	130dB
directivity (h x v)	90°/10°
midrange-transducer rated size	2x6.5"
midrange-transducer voice coil diameter	2" (52mm)
LF-transducer magnet structure	neodymium
HF-compression driver rated size (VC)	2.5" (63mm)
HF-compression throat diameter	1.4"
HF-compression magnet structure	neodymium
dimension w/h/d in mm	480/210/350
weight	14.7kg

* peak 10ms, with TD-8000 amplifier and VT-62 max controller setup

** -10dB with VT-62 FR controller setup

***1m free field, pink noise, crest factor 10dB, with TD-8000 and VT-62 SPL bi-amp controller setup

****system vertical directivity depends on quantity and curving of VT-62 cabinets